


Cement Flat Roof Mount Adjustable Triangular Solution



KEY BENEFITS AND FEATURES:

- w Short installation time The cant beam, bottom beam and the back support can be pre-assembled, which greatly reduces the installation time and cost (for pre-assemble details, see the attached video).
- w Adjustable tilt angle The back support consists of two parts with several waist holes, through which the height of the back support can be adjusted, thus realizing the tilt angle.
- w Rooftop undestroyed Several cement blocks are put on the bottom beat to fix the mount, which cause no damage to the rooftop.
- w Adaptable to various modules The height of the clamp and the length of the aluminum rail can be adjusted to match customer's modules.
- Proven reliability The system is designed to stand up to the extreme weather and other international structure load standard by the skilled engineer. The main support components also have been test to guaranty its structure and load-carrying capacity. Its service life can reach 25 years.
- w CE-listed as a complete system.

NO: AG043A0

Technical Information


Installation Site: Cement flat roof
Tilt Angle: Adjustable (25~40 deg)

Applicable Module: Silicon / thin-film module

Wind Load: 62~74km / h Snow Load: 0.5kN / m² Material: Q235B

Surface Treatment: Hot-dip galvanizing

Warranty: 10-year warranty and 25-year service life.

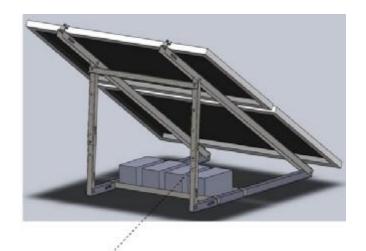

Adjustable back support