


Application >>

The product is suitable for HV and UHV transmission with voltage higher than 220kV.

Highlights >>

It adopts TROESTER dried curing production line that the quality is high, the performance is excellent and the price is affordable.

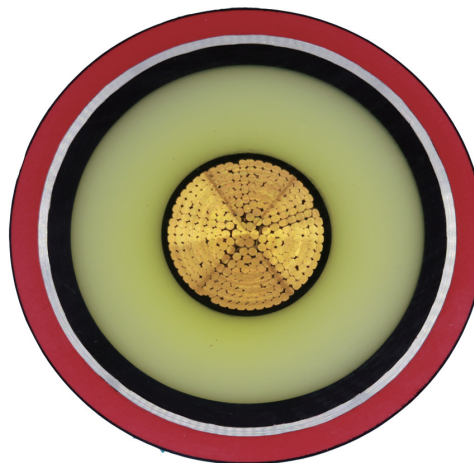

Technical Data Sheet

Specification Size	Diameter of conductor	Thickness of insulation Nominal Thickness of Insulation	Diameter over insulation	Over-all diameter Approx. OD of Cable	Cable weight (Cu conductor) Approx. Weight of Cable	
					PVC sheathed	PE sheathed
mm ²	mm	mm	mm	mm	kg/km	kg/km
400	23.5	27.0	81.2	114.4	13279.2	12538.4
500	26.5	27.0	84.2	117.4	14641.0	13879.7
630	30.0	26.0	85.7	119.4	16058.3	15283.9
800	34.0	25.0	87.7	121.4	17804.4	17016.4
1000	38.6	24.0	90.6	125.9	20208.8	19389.8
1200	41.8	24.0	93.8	128.9	22057.0	21217.3
1400	45.3	24.0	97.3	132.0	24246.2	23385.5
1600	48.4	24.0	100.4	135.9	26459.5	25572.6
1800	51.2	24.0	103.2	138.7	28689.8	27783.7
2000	54.3	24.0	106.3	142.5	31080.7	30148.4
2200	56.4	24.0	108.4	144.5	32820.6	31874.6
2500	60.8	24.0	112.8	149.4	36051.3	35071.9